


## PRODUCT DBRS

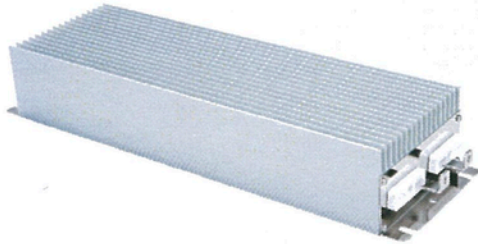


Dynamic Braking Resistor  
2kW ~ 3kW

### Specifications

Model	Rated Wattage	Resistance Value(Ω)		Tolerance
		W	N	
DBRS-2000	2000W	0.1~5.0k	0.1~2.0k	G: ±2%
DBRS-2500	2500W	0.1~7.0k	0.1~3.0k	J: ±5%
DBRS-3000	3000W	0.1~9.0k	0.1~4.0k	K: ±10%

### Dimensions

Model	Unit(mm)						
	L1±1.5	L2±1.5	L3±1.5	W1±1.0	W2±1.0	H±1.0	H±1.0
DBRS-2000	340	321	302	120	90	68	68
DBRS-2500	400	381	362	120	90	68	68
DBRS-3000	480	441	422	120	90	68	68

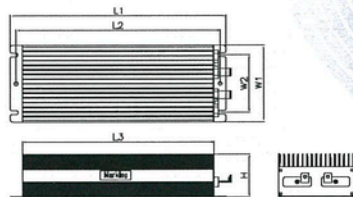

### How to order

DBRS	3000W	N	30Ω	J	T145
Model	Rated Wattage	For non-inductive	Resistance value	Tolerance	Thermostat sensor type 145°C/200°C

## PRODUCT GRW



Dynamic Braking Resistor  
500W ~ 1kW


### Specifications

Model	Rated Wattage	Resistance Value(Ω)	Tolerance
GRW-500	500W	10Ω~2kΩ	J: ±5%
GRW-1000	1kW	10Ω~5kΩ	J: ±5%

### Characteristics

Temperature range	-55~450°C
Temperature coefficient	±100ppm/°C, ±260ppm/°C

### Dimensions

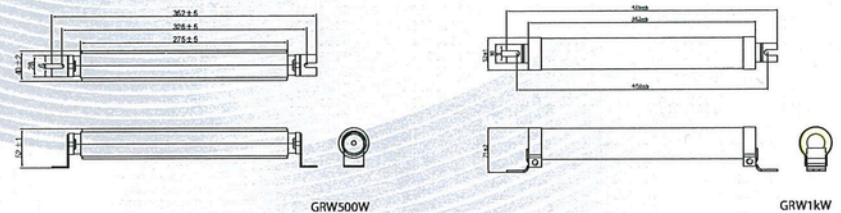

Unit(mm)

### How to order

GRW	1000W	30Ω	J
Model	Rated Wattage	Resistance value	Tolerance