


OPERATION PROCESSING IN POWER INTERRUPTION DETECTION (DETECTION VOLTAGE LEVEL 80%)		SELECT
1	ABOUT 20ms OR MORE DETECTS THE POWER FAILURE.	MAJOR FAULT STOP
2	ABOUT 5ms OR MORE DETECTS THE POWER FAILURE.	THE FREERUN STOP
3	ABOUT 300ms OR MORE DETECTS THE POWER FAILURE (300ms DRIVING CONTINUANCE)	MAJOR FAULT STOP
		THE FREERUN STOP

※ THE FREERUN STOP IS INVERTER RESTART IN VOLTAGE RECOVERY.

AO1	AO2	AO3	AO4
CODE	31	35	
OFFSET	0	0	
GAIN	4.00	2.00	

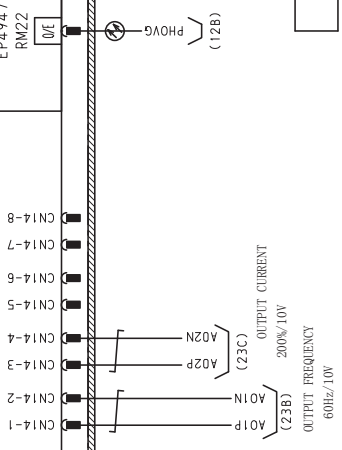

CTR (1/2)
SOFT
<202>
CDJS1FYX-5365A

CONTROL STACK
ST1
<201>
RKJS1SXX-2154L

SWS
2-SWITCH
1-2L-3
TOUCH PANEL

DDC LOADPR
(RS-232C)

CURRENT DETECT(U)

CURRENT DETECT(W)

TP-VMSST-0011
EP4383(C-1)

TCH
<272>

TCHIF
<271>